


# DATA SHEET

EM 400 E4M 01 | 129165

**ruck**.eu  
VENTILATOREN

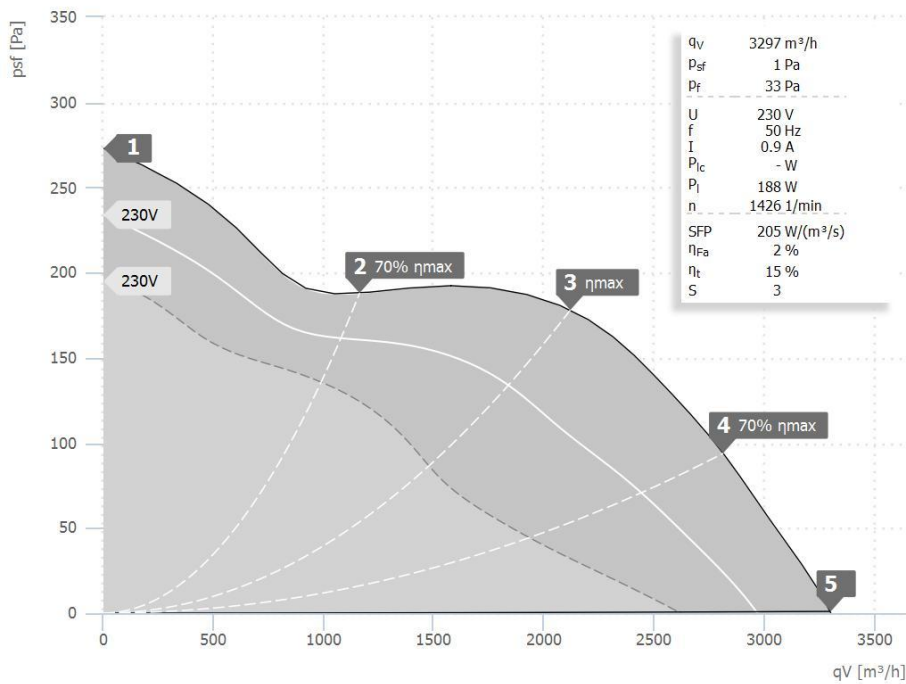

- Diagonal impeller with stator
- With Plastic housing
- 3-step
- Integrated thermostatic switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,8	0,8	0,9	0,9	0,9
Power Consumption P <sub>l</sub>	W	177	174	208	205	188
RPM n	1/min	1436	1438	1414	1416	1426
SPL inlet L <sub>WA5</sub>	dB(A)	74	70	71	70	72
SPL outlet L <sub>WA6</sub>	dB(A)	78	74	75	73	75
SPL casing break out L <sub>WA2</sub>	dB(A)	59	57	57	53	54

Sound power (L <sub>W</sub> ) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L <sub>WA5</sub>	72	31	50	59	65	66	66	64	52
Outlet	L <sub>WA6</sub>	75	32	54	62	70	71	67	64	53
Casing	L <sub>WA2</sub>	54	29	38	40	49	51	44	38	25

EM 400 E4M 01   129165	
Voltage U <sub>N</sub>	230 V 1~
Current I <sub>max</sub>	1
Ambient Temperature t <sub>A</sub>	60 °C
Medium temperatures t <sub>M</sub>	60 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	15,7 kg

