



 Ghisa EN-GJL-250

 Fonte EN-GJL-250


 Hierro fundido EN-GJL-250

 Cast Iron EN-GJL-250


 Grauguss EN-GJL-250

 Чугун EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Характеристическая кривая

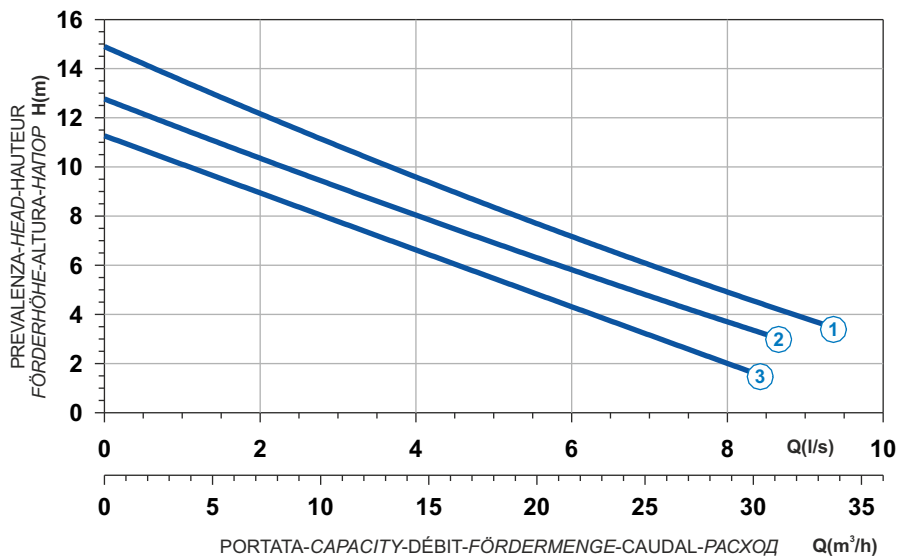

Power supply	1ph 230V 50Hz
R.P.M.	2850
Free passage (mm)	50
Discharge (mm)	DN 50
Max Weight (Kg)	43

Curve N°	Code	Type	MOTOR			ATEX code 
			Rated power P2 (kW)	Rated current I (A)	Starting current Is (A)	
1	7005432	G271M3V1-K50AB1	1,9	11,4	62,7	7005618
2	7006436	G271M3V2-K50AB1	1,5	9	33,3	7006438
3	7006437	G271M3V3-K50AB1	1,5	9	33,3	7006443

Dimensioni - Dimensions - Dimensions - Abmessungen - Dimensiones - Габариты (mm)

